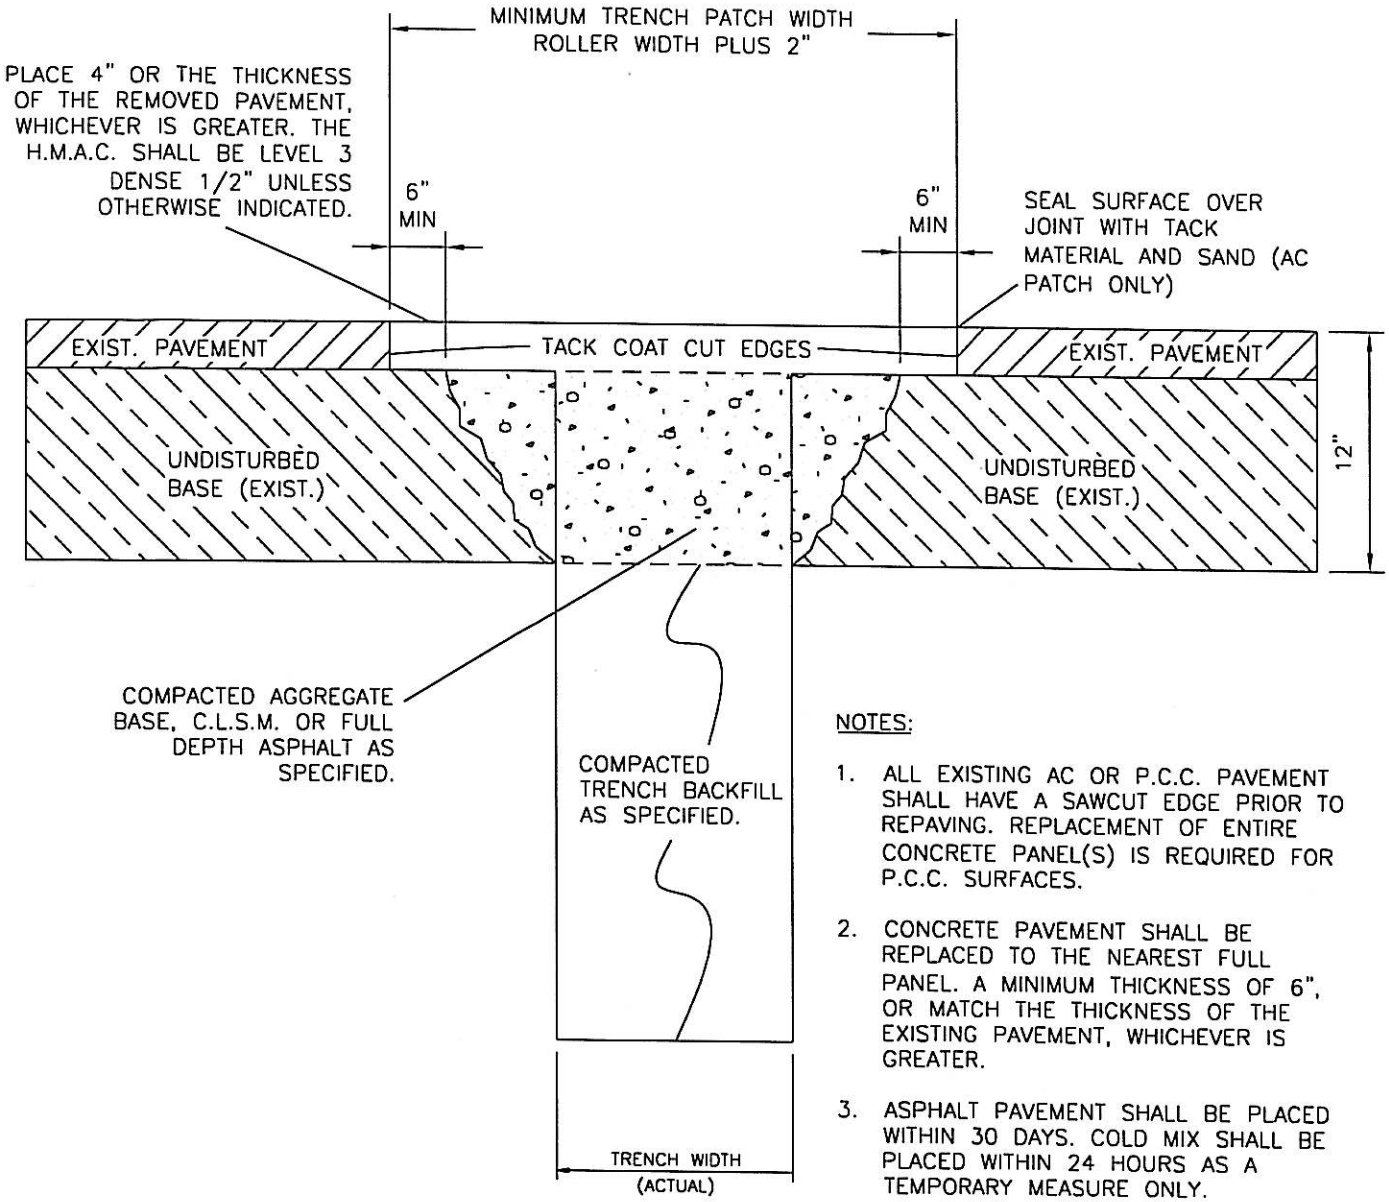

NOTES:

1. ALL EXISTING AC OR P.C.C. PAVEMENT SHALL HAVE A SAWCUT EDGE PRIOR TO REPAVING. REPLACEMENT OF ENTIRE CONCRETE PANEL(S) IS REQUIRED FOR P.C.C. SURFACES.
2. CONCRETE PAVEMENT SHALL BE REPLACED TO THE NEAREST FULL PANEL. A MINIMUM THICKNESS OF 6", OR MATCH THE THICKNESS OF THE EXISTING PAVEMENT, WHICHEVER IS GREATER.
3. ASPHALT PAVEMENT SHALL BE PLACED WITHIN 30 DAYS. COLD MIX SHALL BE PLACED WITHIN 24 HOURS AS A TEMPORARY MEASURE ONLY.
4. TWO COMPACTION TESTS SHALL BE PERFORMED FOR EVERY 25 LINEAR FEET OF STREET CUT, OR AS DIRECTED BY THE ENGINEER. A MINIMUM OF ONE TEST IS REQUIRED FOR STREET CUTS LESS THAN 25 LINEAR FEET IN LENGTH.

CITY OF LEBANON
It's easier from here.

CITY of LEBANON SUPPLEMENTAL DRAWING

APPROVED

CITY ENGINEER

STANDARD STREET CUT

DATE: Jan. 2009

DRAWING NO: 00400-02