



PIPE CONNECTION SHALL CONFORM WITH DIVISION 3.

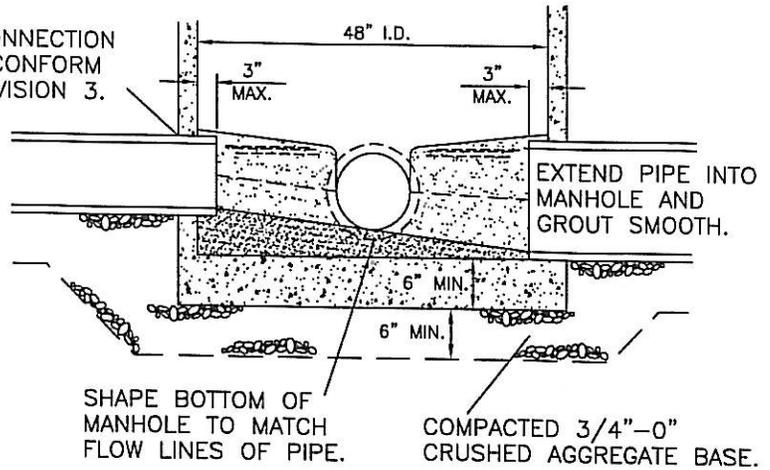


SECTION A-A

**NOTES:**

1. BASES SHALL BE PRECAST.
2. CHANNELS SHALL BE CONSTRUCTED TO PROVIDE SMOOTH SLOPES AND RADII TO OUTLET PIPE.
3. KOR-N-SEAL BOOT REQUIRED.
4. THIS MANHOLE BASE SECTION SHALL BE USED FOR PIPE SIZES UP TO 24", UNLESS OTHERWISE SPECIFIED ON STD DWG 00400-20.
5. GROUT MAY BE USED FOR CREATING CHANNELS. THE PRECAST BASE SHALL BE SCARIFIED PRIOR TO PLACING A 2" THICK (MIN.) GROUT CHANNEL.

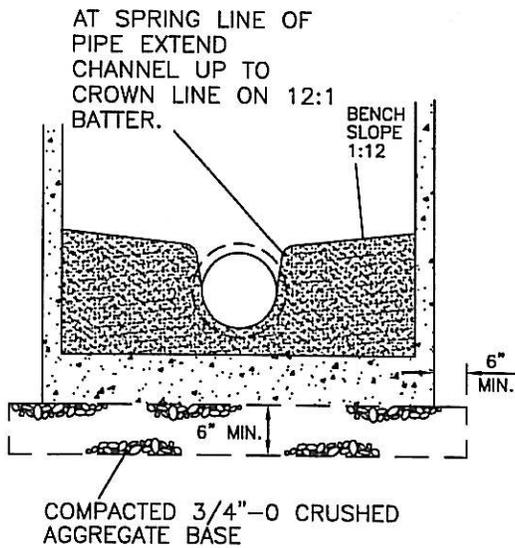

SECTION B-B

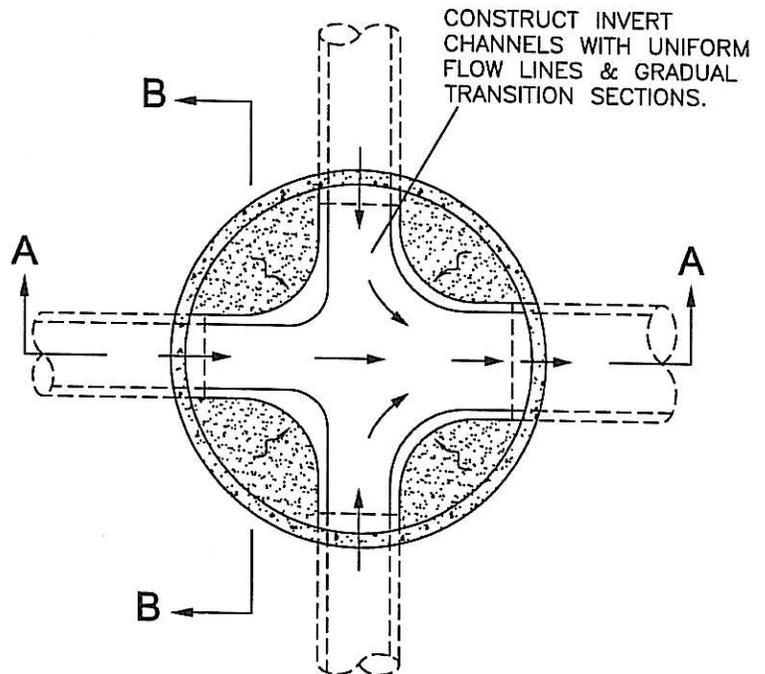

PLAN



CITY of LEBANON SUPPLEMENTAL DRAWING

APPROVED

*Danaj H. Hamid*  
CITY ENGINEER

MANHOLE BASE SECTION

DATE:  
Jan. 2009

DRAWING NO:  
00400-18